


# EARTH DRILL 100,000MAX

## FEATURE OVERVIEW





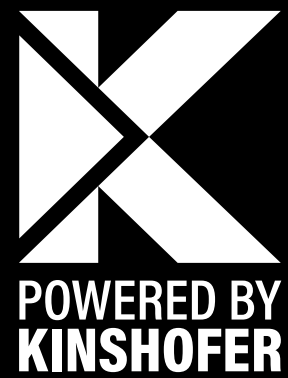

## **EARTH DRILL 100,000MAX**

Part of the heavy duty range in the Auger Torque product line up - they are highly engineered and built to last.

Having surveyed the market & through our frequent and direct collaboration with operators specialising in large screw pile and hard rock drilling applications we are excited to release the Earth Drill 100,000MAX globally.



# 100,000MAX | FEATURES & APPLICATIONS

A perfect choice for excavators between 21-50T, this drive unit is geared towards high torque applications. With a weight of just over 1T we have managed to keep the weight down for versatility whilst not sacrificing any of the robustness our drives are renown for. Running a massive 150mm HEX shaft we are confident it will stand up to the toughest of applications time & time again.

## FEATURES

- Up to 100,069 Nm of Torque
- Up to 15 rpm rotational speed
- Massive 150mm Hex Shaft
- Large Main Shaft Bearings
- Non-Dislodgement Shaft
- Life time non-dislodgement guarantee
- Low-weight at just over 1T (XHT was 2T)
- Single-piece driveshaft
- Compatible with AT Alignment Monitors
- Covered by Auger Torque's industry leading warranty

## APPLICATIONS

- Large diameter & deep auger drilling
- Hard Rock Auger drilling
- Core barrel drilling
- Pole and mast installations
- Foundation piles
- Large diameter screw pile installations
- Rail applications
- Exploration & research
- Compatible with excavators from 21T onwards allowing for low impact and reasonably tight access application where typically larger machines would have to be used.

# EARTH DRILL 100,000MAX | TECHNICAL SPECIFICATIONS

## SUITABLE FOR EXCAVATORS

21 - 50T (42,000 - 110,231 lbs)

Torque Range: 45,746 - 100,069 Nm (33,741 - 73,807 ft-lb)

Oil Pressure Range: 160 - 350 Bar (2321 - 5,076 psi)

Oil Flow Range: 100 - 280 lpm (26.4 - 74.0 gpm)

Speed Range: 5 - 15 rpm

Unit Height: 1,623mm (63.90in)

Unit Diameter: 6636mm (25.04in)

Unit Weight: 1061 kg (2,339 lbs)

## OUTPUT SHAFT

150mm Hex

## HITCH OPTIONS

Double Pin Cradle

## VALVE OPTIONS

2 Way Valve - Converts single acting hammer into a 2 way auxiliary flow





# 100,000MAX | FEATURES

## EPICYCLIC GEARBOX

Torque is amplified by using the unique Auger Torque planetary gearbox. This system allows the motors output torque to be multiplied with extreme efficiency as well as ensuring the durability and reliability you need.

## AXIAL PISTON MOTOR

Axial Piston Motors allow us to run a single speed motor. By using an axial piston motor with our drive we can have a high speed motor but still achieve high torques through the gearbox multiplication. At maximum flow we achieve 15 rpm.

## SINGLE PIECE NON DISLODGEEMENT SHAFT


As is standard with all of our auger & screw pile drives, our patented single-piece non-dislodgement shaft is of course a standard feature. We are so confident in this must have safety feature that we are covering it with a lifetime warranty.

## 150MM HEX SHAFT

The driveshaft is crucial for reliability and it goes without saying that the bigger the better applies here. A shaft is always stronger when machined as a hex and the 150mm diameter is the largest in the industry, especially when looking at compatibility on machine as small as 21T.



SCAN FOR  
VIDEO

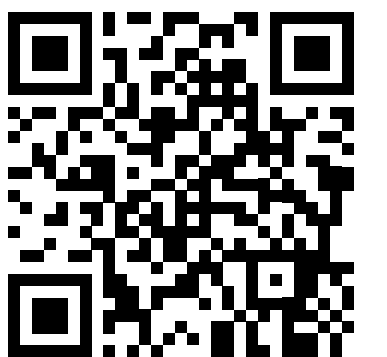



Connect with us



[www.augertorque.com](http://www.augertorque.com)

AUGER TORQUE EUROPE Ltd. Hazleton, Cheltenham, GL54 4DX, ENGLAND.

Phone: +44 (0) 1451 861 652

Email: [sales@augertorque.com](mailto:sales@augertorque.com)